




TCK Single arm C-Hooks

Working load limit (WLL) 500 - 10000 kg

The Camlok TCK C-Hooks have been designed to safely and efficiently handle coils, rolls, rings, pipes, round stock and other similar loads.

Many features are available on C-hooks. When lifting collared or standard pipes, the optional backstop device can be positioned as far back as possible. If the lifting of shorter pipes is required the backstop can be adjusted accordingly. Loads that are longer, or exceed the specified working load limit, should not be lifted. Camlok uses the latest 3D CAD design technology to produce bespoke products tailored to customer requirements. There are many additional options available including shaped tines and adjustable end-stops.

Product group: I4

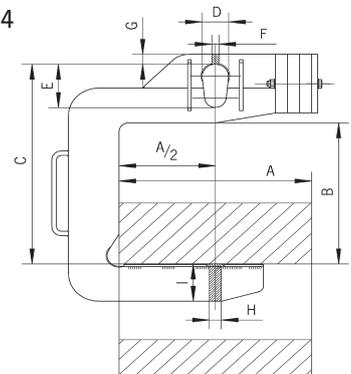

Technical data TCK

Model	Art.-No.	WLL kg	Coil width A mm	Usable height B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight kg
TCK0.5/300	N53507801	500	300	400	570	60	120	20	25	20	50	21
TCK0.5/500	N53507802	500	500	400	580	60	120	20	23	20	65	30
TCK0.5/800	N53507803	500	800	400	580	60	120	25	23	25	70	46
TCK1.0/300	N53507804	1000	300	450	620	60	120	25	23	20	70	28
TCK1.0/500	N53507805	1000	500	450	630	60	120	20	23	25	80	40
TCK1.0/800	N53507806	1000	800	450	630	60	120	30	23	30	90	95
TCK2.0/300	N53507807	2000	300	500	700	75	150	25	38	25	90	45
TCK2.0/500	N53507808	2000	500	500	700	75	150	30	38	30	110	90
TCK2.0/800	N53507809	2000	800	500	720	75	150	30	38	30	125	140
TCK2.0/1000	N53507810	2000	1000	500	720	75	150	20	35	40	125	180
TCK3.0/300	N53507811	3000	300	500	700	75	150	30	38	30	105	68
TCK3.0/500	N53507812	3000	500	500	700	75	150	20	40	30	125	127
TCK3.0/800	N53507813	3000	800	500	720	75	150	25	40	40	140	165
TCK3.0/1000	N53507814	3000	1000	500	720	75	150	20	40	40	155	215
TCK5.0/500	N53507815	5000	500	550	800	100	200	25	45	40	145	184
TCK5.0/800	N53507816	5000	800	550	800	100	200	30	45	50	160	238
TCK5.0/1000	N53507817	5000	1000	550	820	100	200	30	45	50	180	286
TCK5.0/1250	N53507818	5000	1250	550	820	100	200	30	45	50	200	364
TCK7.5/800	N53507819	7500	800	600	900	110	220	35	50	50	200	390
TCK7.5/1000	N53507820	7500	1000	600	900	110	220	35	50	60	200	520
TCK7.5/1250	N53507821	7500	1250	600	900	110	220	35	45	60	220	650
TCK7.5/1500	N53507822	7500	1500	600	920	100	220	35	50	70	220	767
TCK10.0/1000	N53507823	10000	1000	650	980	130	250	40	50	70	220	772
TCK10.0/1250	N53507824	10000	1250	650	1000	130	250	45	55	70	240	810
TCK10.0/1500	N53507825	10000	1500	650	1000	130	250	45	55	80	240	980