



TSH Swivel hook screw clamps

Working load limit (WLL) 750 - 5000 kg

The TSH 'swivel hook' screw clamps is suitable for many applications. It is particularly useful for lifting and pulling sheet metal, girders, and steel constructions. The clamps are supplied complete with an alloy safety shackle that allows for pulling at 180° degrees.

Product group: I2

INFO

The surface of the material to be lifted must not exceed a hardness level of HRC 50/Brinell 480.

Supplied with shackle.



Technical data TSH

| Model | Art.-No. | *WLL kg | Jaw capacity Z mm | *Weight kg |
|---------|-----------|---------|-------------------|------------|
| TSH750 | N51502400 | 750 | 0 - 30 | 3.1 |
| TSH1500 | N51502401 | 1500 | 0 - 32 | 7.4 |
| TSH3000 | N51502402 | 3000 | 0 - 50 | 11.4 |
| TSH5000 | N51502403 | 5000 | 0 - 80 | 27.6 |

*Per clamp

Dimensions TSH

| Model | TSH750 | TSH1500 | TSH3000 | TSH5000 |
|---------|--------|---------|---------|---------|
| A, mm | 190 | 255 | 290 | 470 |
| B, mm | 52 | 65 | 74 | 130 |
| Ø C, mm | 19 | 26 | 30 | 50 |
| D, mm | 43 | 75 | 85 | 135 |
| E, mm | 113 | 130 | 170 | 225 |
| F, mm | 35 | 44 | 50 | 72 |
| X, mm | 15 | 40 | 40 | 50 |

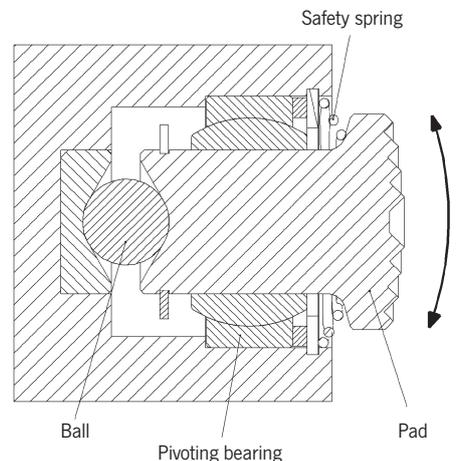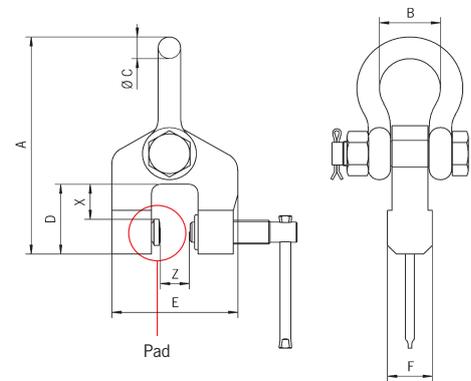

Functional drawing pivoting pad