



ABTECH SAFETY


Unit 38, Drive B, Zone 2,
Deeside Industrial Park, CH5 2NU.

sales@abtechsafety.com
+44 (0) 1244 837 050



User Manual | V1.0

T05T-30

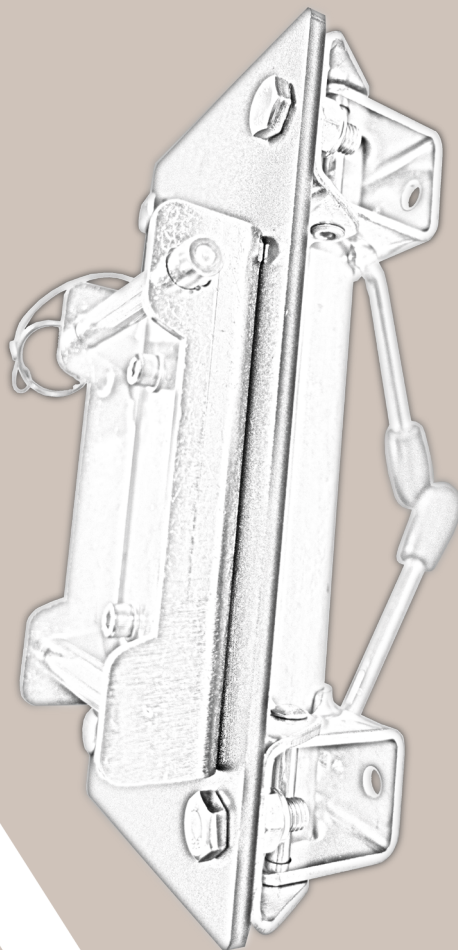

Bracket EN795:2012

Part of Cresto Alliance

BRACKET EN795:2012



All users should read and understand these instructions. All users should be suitably trained and competent to use this equipment. All users must be aware of the hazards and limitations associated with this type of equipment.

- When the product is used within a fall arrest system the anchor point should be above the user.
- When using this equipment within a fall arrest system, adequate clearance should be ensured for the user to prevent collision with the ground or any obstacle in their path.
- When used as part of a fall arrest system, the bracket is for one user only and the user will be equipped with means of limiting the maximum dynamic arrest force to 6KN.
- When fitted to the tripod, any person or load should not be moved outside of the footprint of the tripod as this will cause instability to the system.

Instructions

Mount the bracket onto the outer/upper leg of the tripod, ensuring that the Alko clamps are secured. The equipment should not be used outside its limitations, or any purpose for which it is not intended. The equipment can only be used in the intended combination as it can cause an adverse effect to the safety of the equipment. If there are any medical conditions that could affect the safety of the equipment when in use, then a risk assessment needs to be completed to mitigate these risks.

Before Use & Inspection

The user should make a visual inspection of the equipment. Look for damage to the equipment such as cracks, bent or deformed metal. Ensure that all labels are in place and are correct and legible. Check that all the components are present and functional. Check the correct operation of any moving parts. If there is any doubts about the condition of the equipment, it must be removed from service. A further inspection should then be carried out by a competent person or the manufacturer. No repairs, alterations or additions should be made to this equipment without consultation with the manufacturer. When using this equipment for access and or egress, then a rescue plan should be in operation.

Transport & Storage


The prescribed obsolescence of this equipment is 10 years. It may be serviced and repaired. Parts may be changed. The bracket will be withdrawn from use if it is damaged or worn parts cannot be replaced. Provided the equipment is inspected and maintained in accordance with the manufacturer's recommendations, the lifespan of the equipment should be 10 years. However, this is dependent on the conditions of work and frequency of use.

The bracket should be suitably packaged during transport to minimise the risk of damage. It should be stored when not in use in a cool, dry environment.

It is essential that if the product is resold outside of the original country of destination, that a user manual will be provided in the language of the country for which the bracket is intended to be used.


To clean the product, wipe with a damp cloth. Remove any dust and grit with detergent. If the equipment shall become wet either due to cleaning or from being in use, shall be dried naturally and kept away from direct heat.

T05T-30

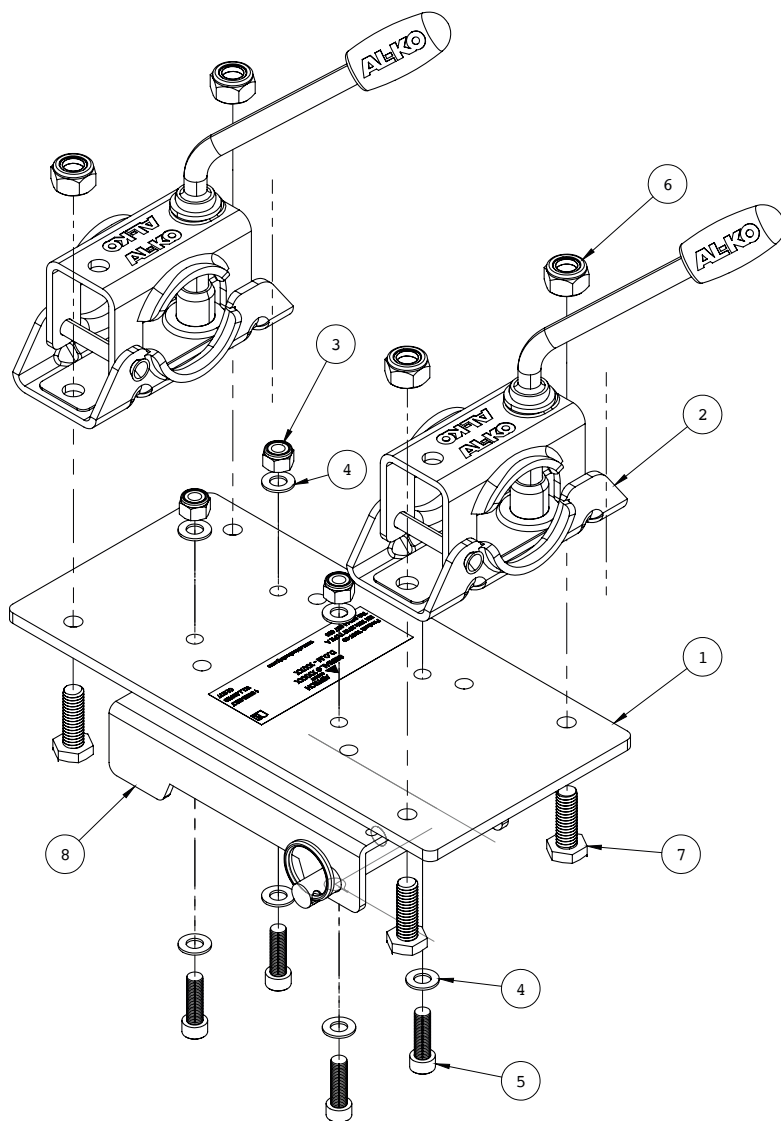

Bill Of Materials

ITEM	PARTNO.	DESCRIPTION	QTY
1	T05730 PLATE	BACK PLATE FOR T05T-30 & 30D BRACKET	1
2	ALKO	ALKO CLAMP C/W NUTS BOLTS & WASHERS	2
3	SNNMP8	M8 NYLOC NUT	4
4	FAB15R21	M8 WASHER	8
5	SSCMZP8X25	M8 X 25 SOCKET CAP SCREW	4
6	FAB15R23	M10 NYLOC NUT	4
7	HTSMZP10X30	M10 X 30 HEX SET SCREW	4
8	RE-BRACKET	30M BRACKET	1
9	T05T-30 LABEL	LABEL	6

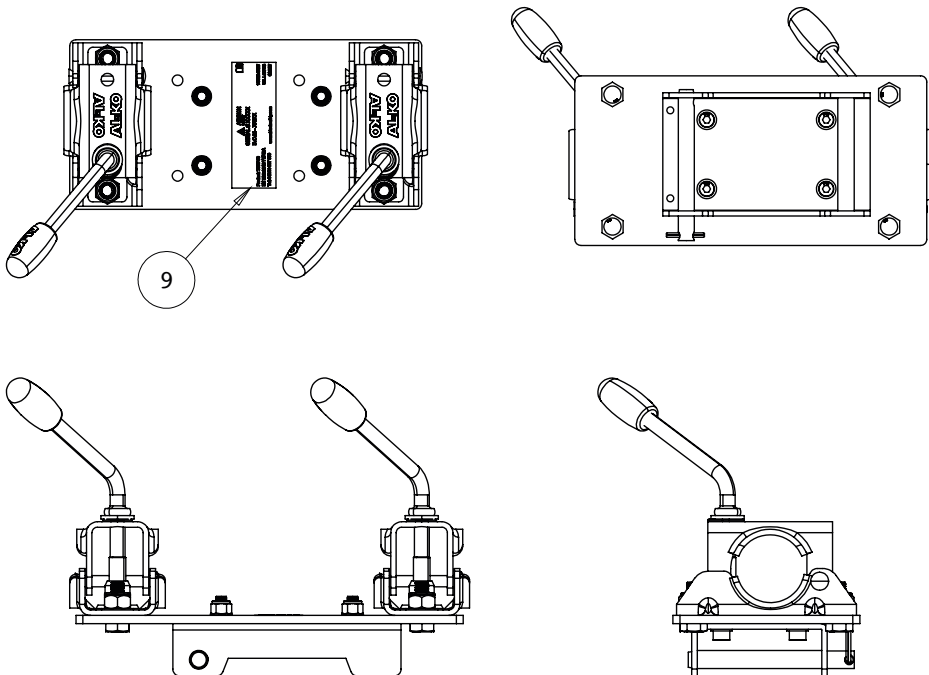

Product Record Card

- Please see the product label details required below.
 - Consult the User Guide for advice on inspection, maintenance, lifespan etc.
- Other components within any fall arrest system in which products are used should conform to the relevant European standards (ENs) or in their absence other appropriate standards.

		 ④
② Product: T05T-30	⑥ Serial #	1 USER ONLY
⑦ EN795:2012 (Type B)	③ D.O.M -	W.L.L 300KG ⑧
Tel: 01244 837 050	① www.abtechsafety.com	CE 2777 ⑤

Product Label Definitions

- | | |
|--|---|
| <ol style="list-style-type: none"> 1. Manufacturers name and contact details 2. Manufacturers product code 3. Date of manufacture 4. Read instructions supplied with product | <ol style="list-style-type: none"> 5. Identifying number of manufacture examination body 6. Serial Number 7. European standard that the product conforms to 8. Working Load Limit |
|--|---|

All PPE Products within this User Guide conform to the European Standards stated and are the subject of EU Certificates of Conformity issued by and under the supervision of the Notified Body:

SATRA Technology Centre Ltd (AB0321) Wyndham Way, Telford Way, Kettering, Northamptonshire, NN16 8SD UK
 PPE Regulation (EU) 2016/425 as brought in UK Law and amended
 Module B (Annex V) EU Type Examination and Module C (Annex VI)
 Module D (Annex VIII)

Manufacture Details

PRODUCT CODE	PRODUCT SERIAL NUMBER
FINAL INSPECTION PRIOR TO DESPATCH BY	DATE
ITEM	USERS NAME
SERIAL NUMBER	DATE OF PURCHASE
	DATE FIRST USED

Inspection Record

JOB USAGE	INSPECTED BY	COMMENTS	DATE

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

[illegible]

Type of Use, Environment & Usage Conditions, Detailed Inspection/Service Frequency



Product Name	
Product Code	
Serial Number	
Date of Manufacture	

The personal protective equipment shall be examined & serviced at least every 12 months by a competent individual.

PRODUCT RECORD CARD

SUPPLIER:..... DATE PURCHASED:...../...../..... USER NAME:..... DATE FIRST USED:...../...../.....

[illegible]