


# Camlok®

## SL SHEARLEGS

The Camlok Shearlegs have been designed to be simple and easy to erect and operate. Each set of shearlegs are supplied, as standard, fitted with safety chains and a large eyebolt for the suspension of hand operated lifting mechanisms, chain blocks or pulleys.

**NB:** These shearlegs must not be used for lifting personnel. Height Safety Tripods are available [CLICK HERE](#) to view

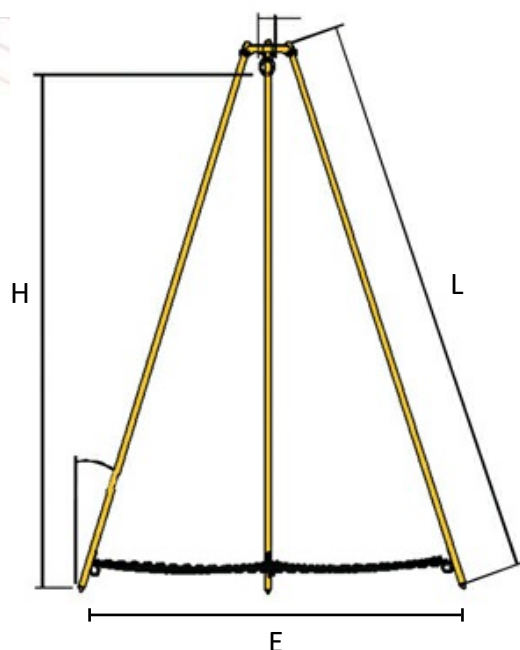

### Available with a variety of leg and foot options:

\* (1) Fitted as standard for hard ground, eg. concrete.

(2) FF. Flat foot for soft ground, eg. earth

(3) FR. Rubber lined foot for internal use.

(4) FC. Combined for hard or soft ground, eg. earth or concrete.

(5) Dual height supplied with 2 safety chains (max. split 2)

(6) Split leg for storage and transport (max split 2)

(7) Adjustable legs suitable for un-level ground, shallow slopes and slight inclines (max. adjustable height 500mm)

Model	WLL kg	Height 'H' to eye mm	Leg 'L' length mm	PCD 'E' mm	Weight kg*
SL0.500/2	500	2000	2254	1800	24
SL1000/2	1000	2000	2276	1816	33
SL1000/3	1000	3000	3340	2544	44
SL1000/4	1000	4000	4411	3270	89
SL2000/3	2000	3000	3366	2554	71
SL2000/4	2000	4000	4430	3282	90
SL3000/3	3000	3000	3409	2730	88
SL3000/4	3000	4000	4473	3458	108



**dlhonline.co.uk**

**0161 223 1990**

© 2017 Columbus McKinnon Corporation All rights reserved. Privacy Policy

DLHONLINE Division of Dale Group of Companies Dale Lifting and Handling Specialists  
2 Kelbrook Road Manchester M11 2QA Website [www.dlhonline.co.uk](http://www.dlhonline.co.uk) Email [sales@dale-lifting.co.uk](mailto:sales@dale-lifting.co.uk)