



 **PORTA**DAVIT QUANTUM<sup>®</sup>

REIDLIFTING.COM

Our **PORTADAVIT** QUANTUM is a rapidly deployable, lightweight solution to heavy lifting and lowering of goods and personnel. Weighing from 18.5kg when fully assembled, it can be manually operated by just one person while maintaining a WLL of up to 600kg.

## > Key features

- > EN795:2012 Certified
- > ATEX Certified
- > Can support goods and personnel lifting;
  - > Goods WLL of up to 600kg
  - > Personnel WLL of up to 300kg
- > Ease of assembly with the use of just one pin, no tools required
- > Can be rotated 360° under full load using fingertip control
- > Designed with a universal kingpin suitable for all REID sockets
- > Easy radius adjustment
- > Engineered designs and bespoke sections reduce weight, providing lightweight portability

## > Configurations

The **PORTADAVIT** QUANTUM is available in a strop and winched version for use with a range of lifting equipment.



**600KG  
WLL**



**1 PERSON  
ASSEMBLY**



**FROM  
18.5KG**



**EN795  
CERTIFIED**



**ATEX  
CERTIFIED**



## > Features & Performance

	PDQ 1	PDQ 2
<b>Accreditations, Certifications &amp; Standards</b>		
EN795:2012	✓	✓
PD CEN / TS16415:2013	✓	✓
AS/NZS 5532:2013	✓	✓
ATEX Certified [Zone 2]	✓	✓
ATEX Certified [Zone 1]	Optional	Optional
IRATA	✓	×
<b>Capacity</b>		
Max Goods Lifting (kg)	600	500
Max Personnel Lifting (kg)	300	250
Fall Arrest (Persons)	1	1
<b>Dimensions</b>		
Maximum Reach (mm)	1200	1500
Maximum Height of Lift (mm)	2111	1957
<b>Socket Diameter</b>		
65mm	✓	✓
<b>Socket Options</b>		
Top Mount	✓	✓
Flush Mount	✓	✓
Side Mount	✓	✓
Bridge Mount	✓	✓
Pedestal	✓	✓
Extension Post	✓	✓
<b>Standard Features</b>		
One Piece Unit	✓	✓
Multiple Accessory Attachment	✓	✓
Shackle Lifting points	✓	✓
Weight < 25kg	✓	✓
<b>Optional Extras</b>		
Winch Capable	✓	✓
<b>Finishes</b>		
Anodised	✓	✓
316SS Fixings	Optional	Optional
Marine Spec	Optional	Optional

WINCHED [W]

STROP [S]

- A Overall height
- B Height to outer shackle
- C Height to inner shackle
- D Radius to outer shackle
- E Radius to inner shackle

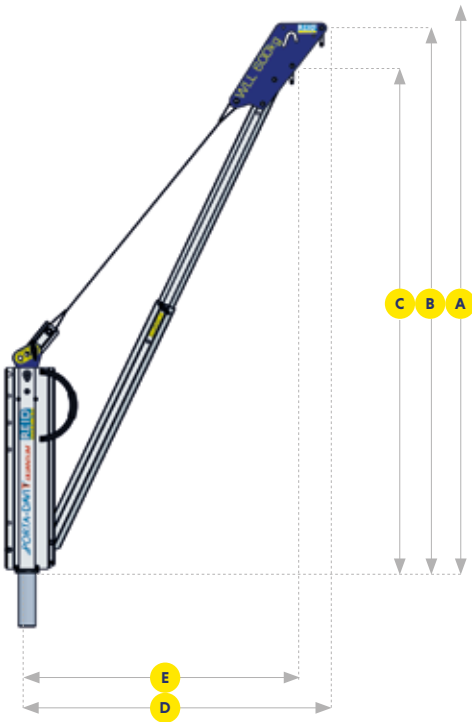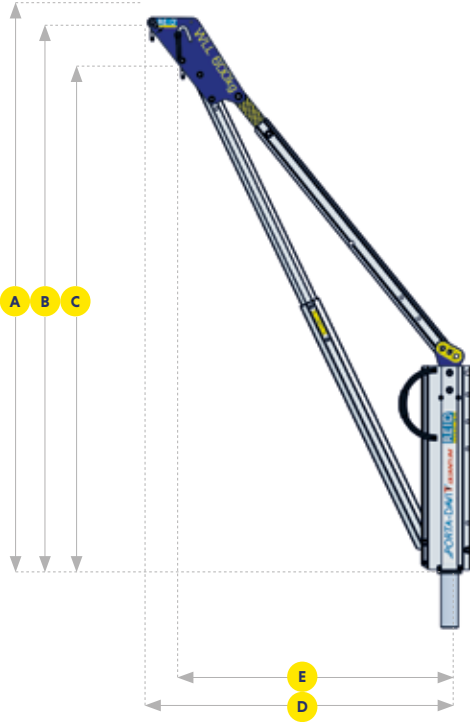

			Dimensions (mm)				
WLL		Radius Adjustment Points	A	B	C	D*	E*
PDQ1S	600kg	1	2007	1935	1799	1200	1100
		2	2061	1989	1848	1100	1000
PDQ1W		3	2111	2039	1892	1000	900
PDQ2S	500kg	1	1837	1766	1647	1500	1400
		2	1899	1827	1703	1400	1300
PDQ2W		3	1957	1885	1755	1300	1200

\*Radii achieved at 75% WLL

All information herein is copyright protected by REID Lifting Ltd. All company and product names are Trade Mark and Trade Name protected and all REID Product IPR is protected under Patents, Patents Pending and/or Design Rights.



Printed using environment friendly processes and materials.

#### REID Lifting

Unit 1 Wyeview,  
Newhouse Farm Ind. Estate  
Chepstow, Monmouthshire  
NP16 6UD UK

> +44 (0)1291 620 796  
 > +44 (0)1291 626 490 (Fax)  
 > enquiries@reidlifting.com  
 > www.reidlifting.com